



isofoton




I-165 Pv Module

CHARACTERISTICS

PHYSICAL	
Dimensions	1310 x 969 x 39,5 mm
Weight	16,5 kg
Number of cells in series	36
Number of cells in parallel	3
NOCT (800W/m ² , 20°C, AM 1.5, 1m/s)	47 °C
ELECTRICAL (1000 W/m ² , 25 °C cell, AM 1.5)	
Nominal Voltage (V _n)	12 V
Maximum Power (P _{max})	165 W _p ± 10 %
Short-circuit current (I _{sc})	10,14 A
Open circuit voltage (V _{oc})	21,6 V
Maximum power current (I _{max})	9,48 A
Maximum power voltage (V _{max})	17,4 V
CONSTRUCTIVE	
Cells	Single-crystal Si, textured and antireflectivity layered
Contacts	Redundant contacts on each cell for circuit reliability
Laminate	EVA (ethylene vinyl acetate)
Front face	Tempered glass with improved light transmission
Back face	Tough multi-layered backsheet Tedlar
Frame	Anodised aluminium
Connection boxes	2 x IP 65 with built-in bypass diodes
Grounding connection	Yes
Certifications	IEC 61215 and Class II by TÜV certificate
Cable Section	4-10 mm ²
Connection box	Pression screw with possibility of soldering/optional multi-contact

8° Ed. 01/2004

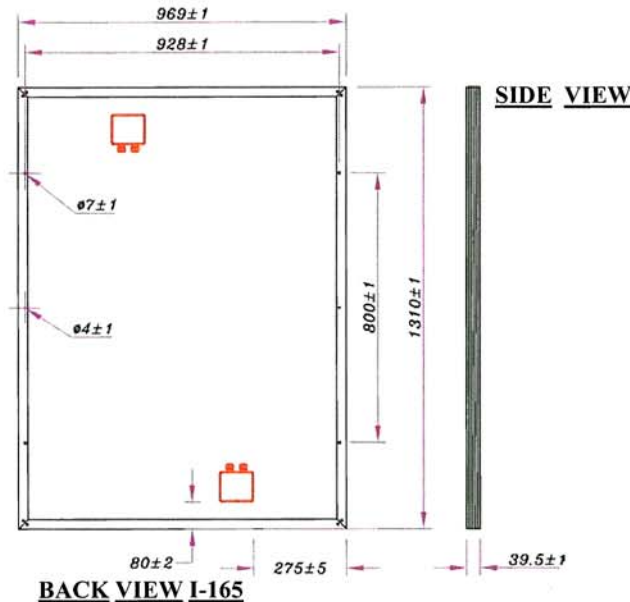


HOME OFFICE
 543 Northeast "E" Street
 Grants Pass, OR 97526
800 GO SOLAR
 www.energyoutfitters.com

CANADA
 British Columbia
 604 596 2228
 gord@energyoutfitters.com

NEW JERSEY
 218 Little Falls Road, #7 & 8
 Cedar Grove, NJ 07009
 973 239 1815
 davidw@energyoutfitters.com

I-165

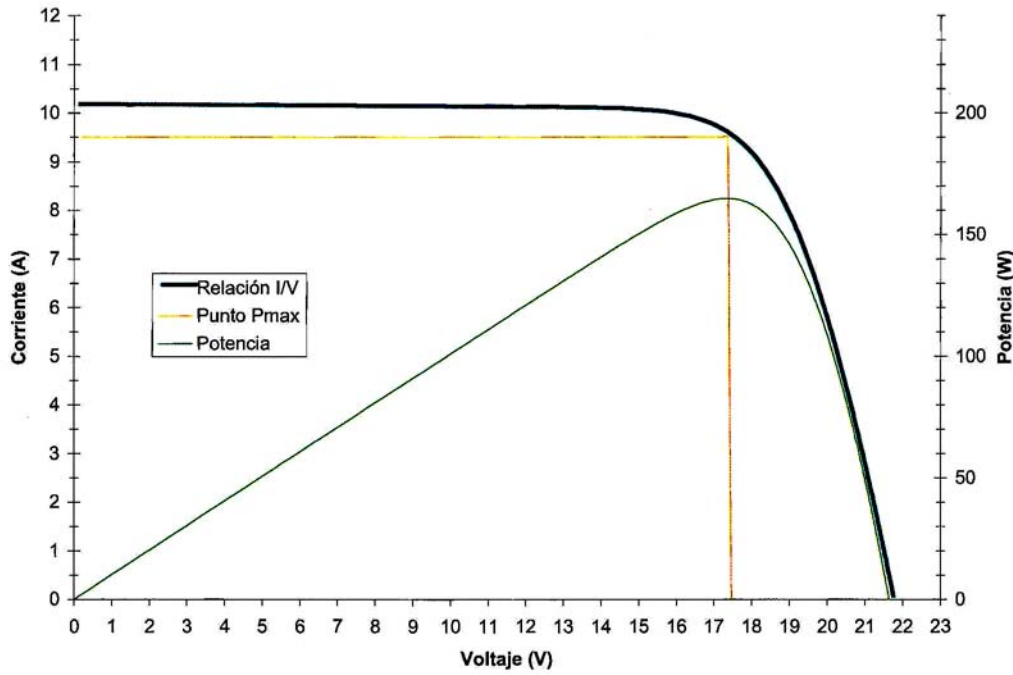


Características eléctricas *

$I_{sc} = 10,14 \text{ A}$
 $V_{oc} = 21,6 \text{ V}$
 $I_{mp} = 9,48 \text{ A}$
 $V_{mp} = 17,4 \text{ V}$
 $P_{max} = 165 \text{ W} \pm 10 \%$
 (*) a 1000 W/m^2 , 25°C y AM 1,5 G

$T_{noc} = 47^\circ\text{C}$
 (800 W/m^2 , 20°C ambiente, AM 1,5 G y veloc. del aire de 1 m/s)

1ª Ed. 01/2004

I-165

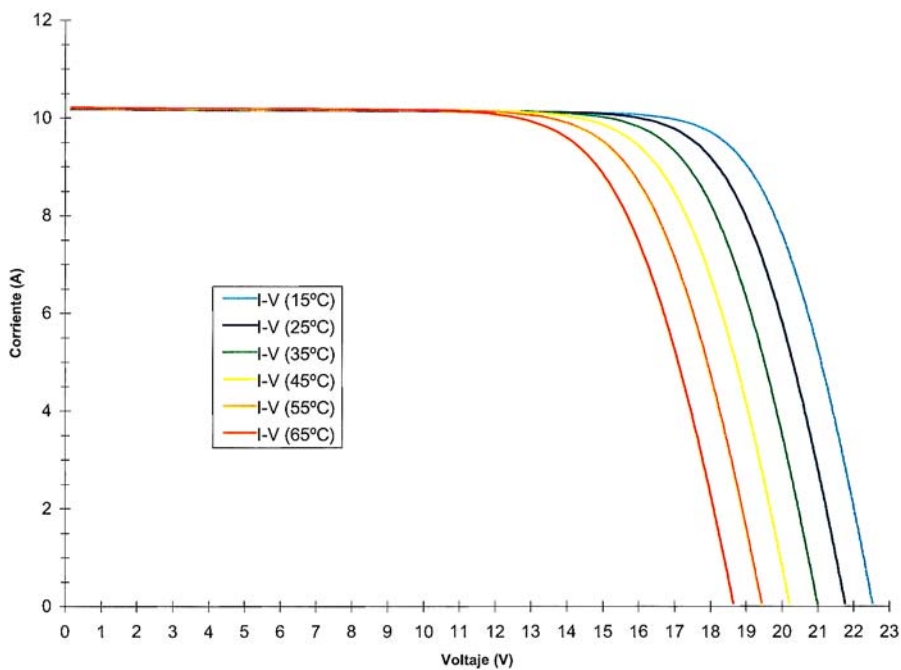

1ª Ed. 01/2004